

jc688 U.S. PTO
01/10/00



GEA Legal

George L. Rideout, Jr.
Counsel-Intellectual Property

General Electric Company
Appliance Park, 2-225
Louisville, KY 40225
502 452-7792
Fax 502 452-0395

A
jc598 U.S. PTO
09/480586
01/10/00

December 30, 1999

Honorable Commissioner of Patents and Trademarks
Washington, D.C. 20231

Re: Docket No. 9D-HL-19136 - Dooley et al

Sir:

Herewith I hand you specification and drawings, 2 sheets, for an application for Letters Patent upon an improvement in:

ISOLATOR BRAKE HUB ASSEMBLY

the invention of: Eddie W. Dooley et al

Basic Fee	\$ 760.00
Additional Fees:	
Multiple dependent claims (\$260)	0
Total number of claims in excess of 20, times \$18	\$ 0.00
Number of independent claims minus 3, times \$78	\$ 0.00
Total Filing Fee	\$ 760.00
Assignment Fee	40.00
TOTAL	\$ 800.00

Enclosed is a check for \$800.00 to cover the fees listed above. The Commissioner is hereby authorized to charge any additional filing fees which may be required, or credit any over-payment, to Account No. 07-0844. This does not authorize charging any subsequent fees to the Deposit Account.

Respectfully,

George L. Rideout, Jr.

George L. Rideout, Jr.
Counsel
GE Appliances, AP2-225

Enclosures

09480586 "011000"

ISOLATOR BRAKE HUB ASSEMBLY

BACKGROUND OF THE INVENTION

This invention relates generally to brake hub and transmission assemblies and, more particularly, to a brake hub assembly for a washing
5 machine transmission.

A washing machine transmission typically includes a cylindrical input shaft and a brake hub. The input shaft generally includes a plurality of grooves on its exterior surface, and the brake hub includes a generally circular opening to receive the input shaft. The brake hub further includes
10 a plurality of ribs that extend into the opening. In operation, the ribs of the brake hub selectively engage the grooves of the input shaft to decelerate, or brake, the spinning input shaft during a wash cycle.

When braking the hub input shaft, the brake hub and input shaft may rattle due to gaps, or spaces, between the shaft and hub. If the brake hub
15 and input shaft are fabricated to very tight tolerances to reduce rattle, appreciable time and dexterity is required to properly assemble the input shaft into the brake hub. In addition, such small manufacturing tolerances tend to increase manufacturing costs. Given the large volume of washing machines manufactured, even a small increase in manufacturing time and
20 costs per machine leads to significant costs.

Accordingly, it would be desirable to provide a brake hub assembly for a washing machine that eliminates rattle between the brake hub and the input shaft during braking, yet does not require a tight fit between the hub and the shaft.

BRIEF SUMMARY OF THE INVENTION

In an exemplary embodiment of the invention, a brake hub assembly for a washing machine includes an input shaft, a brake hub, and a deformable insert positioned between the brake hub and the shaft. The insert isolates the hub from the shaft which reduces, if not eliminates, rattle between the hub and the shaft. The insert also forms a tight fit between the hub and the shaft.

The brake hub includes a generally circular interior surface that defines an opening, and a plurality of ribs that extend into the opening. The deformable insert includes a plurality of substantially flat legs connected by a ring. The insert is fabricated from a resilient material and fits within the brake hub opening. The insert legs extend between adjacent ribs of the brake hub. The input shaft includes a generally circular exterior surface and a plurality of grooves.

During assembly, the deformable insert is positioned within the brake hub. The input shaft is then positioned within the insert so that the grooves of the input shaft receive the ribs of the brake hub. The insert legs deform around the input shaft and place a load on both the input shaft and the brake hub. The legs also separate the input shaft from the brake hub. Since the shaft and the hub are separated, no rattling sound occurs during operation of the washing machine.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a partial exploded view of a brake hub assembly;

Figure 2 is a top plan view of the brake hub and isolator shown in Figure 1 with the isolator inserted into the brake hub;

Figure 3 is a partial cross-sectional view of the brake hub and isolator shown in Figure 2; and

Figure 4 is a partial cross-sectional view of the brake hub assembly shown in Figure 1 after the brake hub assembly has been assembled.

DETAILED DESCRIPTION OF THE INVENTION

Figure 1 is an exploded view of a brake hub assembly 10 including an input shaft 12, a brake hub 14, and an isolator insert 16. Isolator insert 16 is positioned between brake hub 14 and input shaft 12 and separates brake hub 14 from input shaft 12.

Input shaft 12 includes a generally cylindrical exterior surface 18 and a number of grooves 20. Each groove 20 includes a base 22 and two substantially perpendicular sides 24. Grooves 20 extend inward toward a center 26 of input shaft 12. Input shaft 12 is connected to a motor (not shown) that rotates shaft 12 during operation of a washing machine (not shown).

Brake hub 14 includes a generally cylindrical interior surface 28 that defines a substantially circular opening 30. Opening 30 extends through brake hub 14. Brake hub 14 also includes ribs 32 that project into opening 30. Each rib 32 includes a face 34 and two sides 36 substantially perpendicular to face 34. Brake hub opening 30 is dimensioned to receive input shaft 12 so that each rib 32 extends within a respective groove 20. In an alternative embodiment, greater or fewer than six ribs and grooves as illustrated are used to engage the shaft and the hub. In further alternative embodiments, alternative shapes to the three-sided generally rectangular ribs and grooves are employed.

Isolator insert 16 is fabricated from a resilient plastic and includes a plurality of legs 38 connected to a ring 40. Legs 38 are substantially flat, extend linearly from ring 40, and have a rectangular cross sectional shape. Ring 40 includes a plurality of flares 42 that project from ring 40 between adjacent legs 38. Flares 42 contact a top 44 of ribs 32 when legs 38 are

approximately centered between adjacent ribs 32 of brake hub 14 and prevent insert 16 from slipping through brake hub opening 30. In the embodiment illustrated in Figure 1, isolator insert 16 includes six legs 38 and six flares 42.

5 Each leg 38 includes a free distal end 46 and a proximal end 48 that is connected to ring 40. A number of tabs 50 project outwardly from distal end 46 of each leg 38. Tabs 50 engage a bottom 52 of brake hub 14 and prevent separation of isolator insert 16 and brake hub 14. Tabs 50 and ring 40 are sufficiently separated so that when isolator insert 16 is fully inserted
10 into brake hub opening 30, tabs 50 contact bottom 52 of brake hub 14 and ring 40 is adjacent a top 54 of brake hub 14. Tabs 50 maintain isolator insert 16 within brake hub 14. While the embodiment shown in Figure 1 has two tabs 50 on each leg 38, one, three or more tabs 50 could be used on some or all of legs 38.

15 Figure 2 is a top view of isolator insert 16 positioned within brake hub 14. Legs 38 extend linearly and approximately equidistant through opening 30 between adjacent ribs 32 of brake hub 14. Brake hub 14 and isolator insert 16 are symmetric to prevent imbalances when attached to a rotating input shaft 12. When isolator insert is inserted into brake hub 14,
20 legs 38 restrict brake hub opening 30 and provide an interference fit with input shaft 12.

 Figure 3 illustrates a cross section of isolator insert 16 positioned within brake hub 18. Since legs 38 are substantially flat and interior surface 28 of brake hub 14 is substantially round, a gap 56 is created
25 between legs 38 and hub interior surface 28. In addition, each substantially flat leg 38 functions as a beam and provides a load to interior surface 28 of brake hub 14 as a beam, i.e., a load applied to brake hub interior surface 28 by a first side 58 and second side 60 of leg 38. A gap 62 extends between legs 38 and ribs 32. Legs 38 deform within gap 62 without contacting ribs

32 and generating shear stress on ribs 32 when input shaft 12 is positioned within brake hub 14. In an alternative embodiment, legs 38 are substantially flat, include rounded ends, and have an elongate oval cross section.

5 Figure 4 illustrates a cross section of brake hub assembly 10. Input shaft 12 is inserted within isolator insert 16 which is inserted within brake hub 18. Legs 38 are deformed around input shaft 12 and have an arcuate shape approaching the curvature of brake hub opening 30, reducing gap 56 between leg 38 and interior surface 28 of brake hub 14. The resilient
10 deformation of legs 38 directs an inward radial force against input shaft 12, directs an outward radial force against interior surface 28 of brake hub 14, and radially separates brake hub 14 from input shaft 12. Therefore, base 22 of each groove 20 is separated from face 34 of a corresponding rib 32, and rattling between input shaft 12 and brake hub 14 is avoided.

15 Isolator insert 16 is fabricated of molded plastic, such as _____, or other suitable material sufficiently resilient to separate brake hub 14 from input shaft 12, while still allowing relatively easy positioning of input shaft 12 into isolator insert 16 and brake hub 14. Additionally, the resilient deformation of legs 38 allows a variance in the
20 relative dimensions of brake hub 14 and input shaft 12 while preventing rattling therebetween. Further, due to the load that deflected legs 38 place on shaft 12 and hub 14, close manufacturing tolerances may be relaxed and an acceptable fit may still be achieved between brake hub 14 and input shaft 12.

25 A method for assembling hub assembly 10 includes inserting isolator insert 16 into brake hub 14 with flat legs 38 extending between adjacent ribs 32 of brake hub 14. Legs 38 are inserted into brake hub opening 30 until tabs 50 at distal ends 46 of legs 38 extend through opening 30 and engage bottom 52 of hub 14. Tabs 50 lock insert 16 to brake hub 14 and prevent

isolator insert 16 and brake hub 14 from separating. In addition, flares 42 of insert ring 40 are positioned adjacent rib tops 44. Input shaft 12 is then positioned within opening 30 with grooves 20 engaging ribs 32 of brake hub 14. Input shaft 12 contacts legs 38 of insert 16, causing legs 38 to deform within brake hub 14. Input shaft 12 is thus separated from brake hub 14 and rattling therebetween is prevented.

While the invention has been described in terms of various specific embodiments, those skilled in the art will recognize that the invention can be practiced with modification within the spirit and scope of the claims.

0943035555 0110000

CLAIMS:

1. A hub assembly for a washing machine transmission, said assembly comprising:
 - a brake hub comprising an opening therethrough; and
 - 5 an isolator insert comprising a plurality of substantially flat legs, said insert positioned at least partially within said hub opening.
2. A hub assembly in accordance with Claim 1 wherein said isolator insert further comprises a ring, said legs connected to said ring.
3. A hub assembly in accordance with Claim 1 wherein said legs
10 comprise a substantially rectangular cross section.
4. A hub assembly in accordance with Claim 3 wherein said isolator insert comprises six legs.
5. A hub assembly in accordance with Claim 1 wherein said hub further comprises a bottom, at least one of said legs comprises a tab, said
15 tab configured to engage said hub bottom.
6. A hub assembly in accordance with Claim 1 wherein said brake hub opening is substantially circular, said interior surface including a plurality of ribs, said isolator insert legs configured to extend through said openings and between adjacent ribs of said brake hub when said isolator is
20 inserted into said hub.
7. A hub assembly for a washing machine transmission, said assembly comprising:

00430556-011000

an input shaft;

a brake hub comprising an opening therethrough, said input shaft positioned within said opening; and

an isolator insert comprising a plurality of resilient legs, said legs
5 extending at least partially into said brake hub opening between said hub and said input shaft.

8. A hub assembly in accordance with Claim 7 wherein said legs are substantially flat when said insert is positioned within said hub, and said legs are curved when said isolator insert is positioned onto said input shaft.
10

9. A hub assembly in accordance with Claim 7 wherein said isolator insert comprises six legs.

10. A hub assembly in accordance with Claim 7 wherein said insert further comprises a ring connecting said legs.

11. A hub assembly in accordance with Claim 7, wherein said legs include a proximal end and a distal end, at least one of said legs including a tab at said distal end, said tab configured to engage said hub.
15

12. A hub assembly in accordance with Claim 7 wherein said interior surface includes a plurality of ribs, said legs extending between said ribs.
20

13. A hub assembly in accordance with Claim 12 wherein said legs are separated from said ribs.

09480565-011000

14. A hub assembly in accordance with Claim 12 wherein said opening is substantially circular.

15. A hub assembly in accordance with Claim 14 wherein said input
shaft comprises an exterior surface, said exterior surface including a
5 plurality of grooves configured to receive said ribs.

16. A hub assembly in accordance with Claim 7 wherein said insert comprises plastic.

17. A method for assembling a hub for a washing machine transmission, the transmission including an input shaft, a brake hub, and an isolator insert, the hub having a substantially circular interior surface defining an opening for receiving the input shaft, the isolator insert including a ring and a plurality of substantially flat legs, said method comprising the steps of:

inserting the isolator insert into the brake hub so that the flat legs of
15 the insert extend at least partially into the opening of the hub; and
positioning the input shaft between the flat legs of the insert and
deforming the legs around the input shaft.

18. A method in accordance with Claim 17 wherein the interior
surface of the hub includes a plurality of ribs, said step of inserting the
20 isolator insert comprises the step of:

extending the flat legs of the isolator insert between the ribs of the interior surface of the hub.

19. A method in accordance with Claim 17 wherein the hub further includes a bottom, the legs of the insert including a proximal end and a

-10-

distal end, at least one of the legs including a tab at the distal end, said step of inserting the isolator insert comprising the step of;

inserting the insert into the hub until the tab engages the bottom of the hub.

20. A method in accordance with Claim 17 wherein the hub further includes a top and the isolator insert further includes a ring connecting the flat legs, said step of inserting the isolator insert comprising the step of:

inserting the insert into the hub until the ring of the insert contacts the top of the hub.

ISOLATOR BRAKE HUB ASSEMBLY

ABSTRACT OF THE DISCLOSURE

A brake hub assembly for a washing machine transmission includes an input shaft, a brake hub, and a deformable isolator insert positioned between the shaft and the hub. The insert includes a plurality of substantially flat legs extending partially into an opening in the brake hub. The legs are deformed by the input shaft when the shaft is positioned within the brake hub. The legs of the isolator insert separate the hub and the shaft and prevent them from rattling.

2025 RELEASE UNDER E.O. 14176

10 →

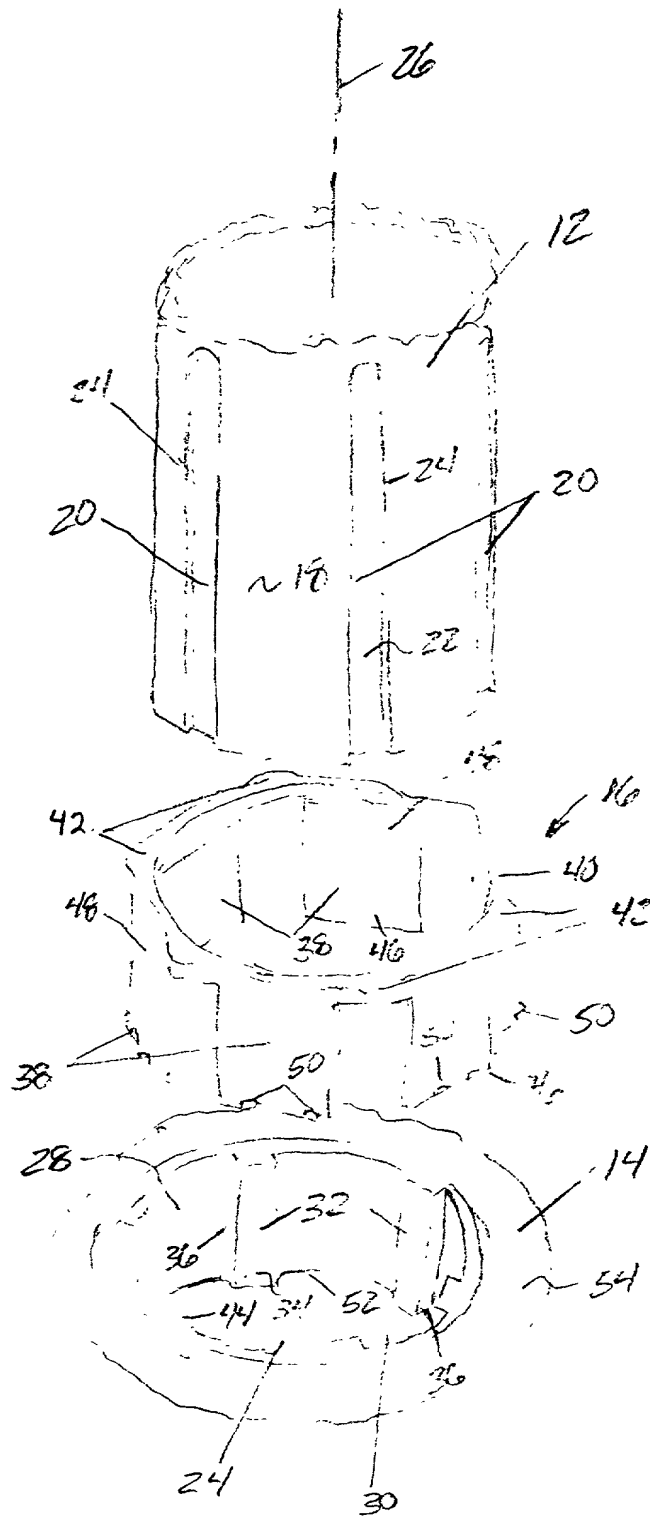


FIG. 1

FIG. 1

05463536 0410000

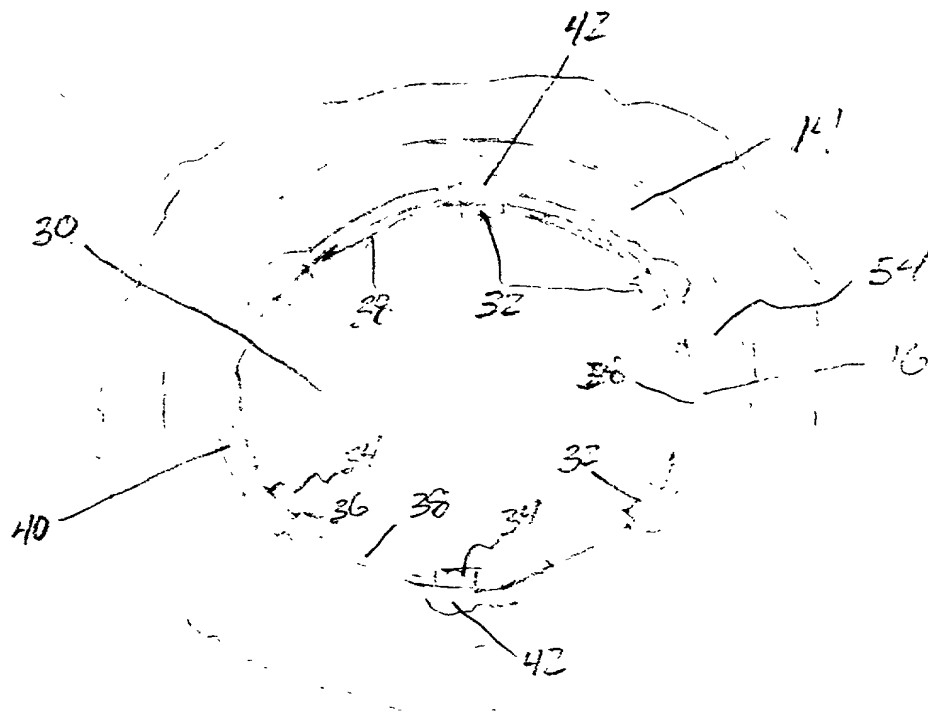


FIG. 2



FIG. 3

FIG. 4

COMBINED DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

As a below-named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled Isolator Brake Hub Assembly, the specification of which:

(check ☒ is attached hereto.

one) was filed on _____ as Application Serial No. _____ and was amended on _____ (if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56(a).

I hereby appoint H. Neil Houser, Reg. No. 28,859, Legal Operation, Appliance Park 2-225, Louisville, KY 40225; and George L. Rideout, Jr., Reg. No. 43,880, Legal Operation, Appliance Park 2-225, Louisville, KY 40225, and H.J. Policinski, Reg. No. 26,621, General Electric Company, 3135 Easton Turnpike, Bldg. W3D, Fairfield, CT 06431-0001, jointly, and each of them severally, my attorneys and attorney, with full power of substitution, delegation and revocation, to prosecute this application, to make alterations and amendments therein, to receive the patent and to transact all business in the Patent and Trademark Office connected therewith. I hereby direct that all correspondence and telephone calls in connection with this application be addressed to the said H. Neil Houser, General Electric Company, at Appliance Park 2-225, Louisville, Kentucky 40225; (502) 452-4653
(mailing address) (Telephone No.)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor Eddie W. Dooley

Inventor's signature _____

Date _____

Residence Clarksville, Indiana

Citizenship United States

Post Office Address 110 Nashua Drive, Clarksville, Indiana 47129

Full name of second joint inventor, if any Mahmoud Fariz Ismail

Second Inventor's signature _____

Date _____

Residence Louisville, Kentucky

Citizenship United States

Post Office Address 425 S. Hubbards Lane, Louisville, Kentucky 40207